


- In stock and available for immediate shipment
- Material is available w/automotive grade adhesive (PSA)
- Slit widths available

Felt Solutions for Anti-Squeak & Rattle

- Any weight & density can be manufactured to your specifications
- Material Meets FMVSS302 Flammability Specification

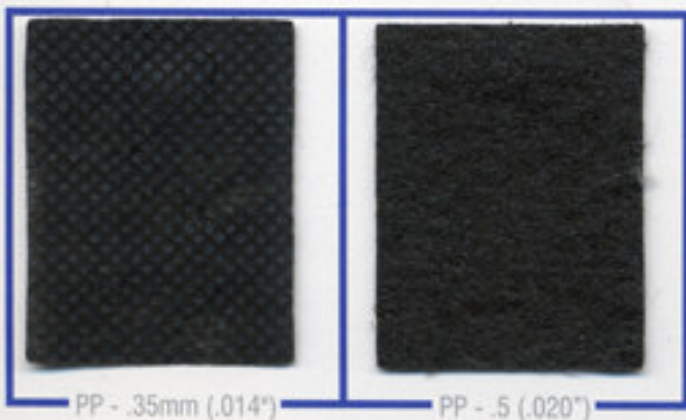

PP - .35mm (.014")

PP - .5 (.020")



PE - 1mm (.039")




PE - 1.5mm (.059")



PE - 2mm (.079")



PE - 3mm (.118")

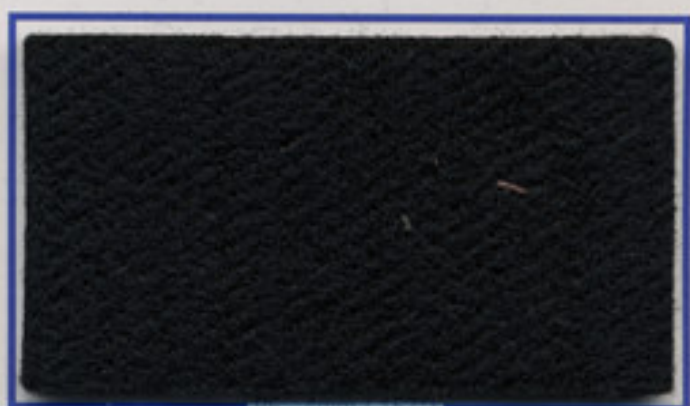

PE - 4mm (.157")

Since 1902

SUTHERLAND
Felt Company

1-877-879-FELT (3358)

www.sutherlandfelt.com

749 E. Mandoline
Madison Heights, MI 48071

Phone: (248) 280-0450

Fax: (248) 280-1034

Email: sales@sutherlandfelt.com

ISO 9001:2000 Registered